


Series 5

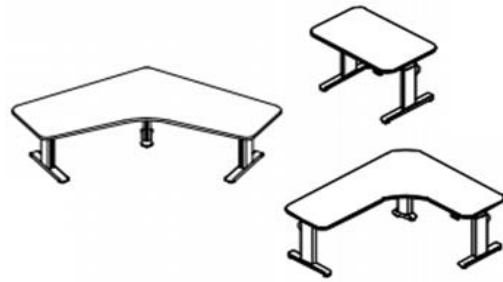

Product Features:

Performance & Specifications:

25-1/2" to 52" electric height adjustability range (assumes .5" glide adjustment)
Travel speed is 1.7" per second
220 lbs. distributed load bearing capacity per table (including worksurface)
Maximum allowable load is to be evenly distributed and must not be exceeded. (See Weight Capacity Guideline for more information)
Lifting columns controlled by "master" and "slave" motors via a single switch
Electrical – 120V, 60Hz, Single phase, 10% duty cycle. May draw 4 amps maximum under full load, idle current is typically 20mA.
All assemblies meet or exceed ANSI/BIFMA standards
More than just a worksurface; add the right worktools and it becomes a fully adjustable workstation

Adjustment:

3-stage synchronized lifting columns with integral shrouding
Push button height adjustability
Infinite height adjustment within the range
2" diameter glides have .5" of height adjustment for surface leveling on uneven floors

Worksurface Construction:

Core is 45 pound particle board
Surface is High Pressure Laminate
Available in the Steelcase Universal Table style
Edge finish is specified separately from laminate color
Reinforced where necessary with steel bars
Available in Rectangular, 90° and 120° Corner configurations
Available in 23" and 29" depths in Rectangular; 23" only in 90° and 120°
Maximum standard table size is 140 linear inches (based on a 90° 70" x 70" x 23" table)
Worksurfaces have pre-drilled mounting holes for the base
Worksurfaces have a 1" gap between rear and panel face for clearance and cable access
Wire management is available
All standard Steelcase laminates supported (see Details SpecGuide for a full list)
Open line laminates are available
Universal worksurfaces are SCS Indoor Advantage™ certified for indoor air quality

Base Construction:

Lifting column and feet are extruded aluminum. Stretcher bar is steel.
Rigid design maximizes floor space without sacrificing stability
Low profile column construction
Full clearance under the worksurface meets ANSI/BIFMA ergonomic guidelines
Electronics are certified by TUV to UL-73 and CSA C22.2

DC motors ensure smooth, quiet operation

Product Features Continued:

Trough provided to manage excess base controller wires

9 ft. power cord

Two-piece telescoping stretcher design

Ships K.D. – minimal tools required for assembly

Base only options are available in Rectangular, 90° and 120° Corner configurations

Color: Black and Platinum

Terms & Conditions:

Warranty:

Worksurface – 10 years

Lifting columns and drive package (including electronics) – 5 years

Lead-time:

Standard – 4 to 6 weeks upon order acknowledgement

Specials – Anything not included in the above, including open line laminates

All leadtimes subject to change based on business conditions

Returns:

Standard returns policy applies

Freight:

Pre-paid

Product Ships K.D.:

Final assembly and installation costs should be considered separately



For further information, please go to the Steelcase website, steelcase.com
or call 888.783.3522

2015 Steelcase Inc. All rights reserved. 6/15