

# Steelcase

Deskling + Storage

## **Steelcase Flex Dock**

Now your team can charge, create and share – faster and easier than ever with Steelcase Flex Dock. Featuring Thunderbolt™ 4 technology, Steelcase Flex Dock integrates with Steelcase CF Series monitor arms to provide immediate connection to power, data and display while keeping cords and cables out of sight. Step up with a laptop, plug in and you're on.



## STEELCASE FLEX DOCK FEATURES

---



### Ready to create

The need to connect is real. Especially for agile teams immersed in co-creation. Steelcase Flex Dock provides convenient desktop power in a compact design, plus it can support up to two 4K monitors – so plugging in and sharing ideas is supremely quick and intuitive. Connect a laptop, phone or tablet. A keyboard, mouse or camera. You decide what goes on the worksurface. The rest is clean simplicity.

### Powerful now and later

Steelcase Flex Dock offers a powerful set of ports – including USB and Thunderbolt™ – for high-speed charging and quick connection to hardwired data, monitors and peripherals. It's made for fast-loading, smooth-streaming, media-rich work. And it goes the distance, adapting to new tech to future-proof your investment.

## STATEMENT OF LINE

---

Style Number: FLEXDOCK



7018 Pewter




0835 Black



ZW01 White


## COMPONENTS

---

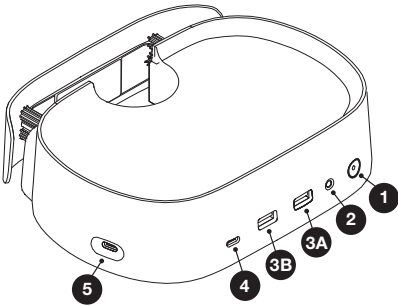

### User Facing Ports

- 1 Illuminated Power Button
- 2 Audio Jack
- 3 USB-A Port (2x)
- 4 Downstream Thunderbolt 4 Port
- 5 Upstream Thunderbolt 4 Port

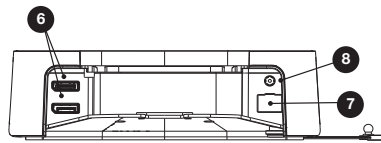

### Rear Facing Ports

- 6 DP 1.4 Port (2x)
- 7 Ethernet Port
- 8 DC Input

# STEELCASE FLEX DOCK SPECIFICATIONS

## USER FACING PORTS\*

<b>1. Illuminated Power Button</b>	Press to power on or off. Button illuminates when dock is powered on.
<b>2. Audio Jack</b>	3.5mm audio in/out combo jack
<b>3. USB-A Port (2x)</b>	Connect to a USB-A device to support transfer at speeds up to 5 GB/s. A. USB-A port (next to audio jack) supports BC1.2 with charging speeds up to 5V=1.5A. B. USB-A port (next to USB-C) with charging speeds up to 5V=0.9A.
<b>4. Downstream Thunderbolt 4 Port</b>	When connected to Thunderbolt laptops, this port will provide video, UBS 3.0, USB 2.0 data speeds and provide daisy chain capability.  Charge at a maximum output of 5V=3A, 15W.  Data transmission rate up to 40Gbps and maximum resolution of 8k@30Hz.
<b>5. Upstream Thunderbolt 4 Port</b>	Connect to provide PD charging of your Thunderbolt & USB-C laptops at 20V=4.5A, 90W.  When connected to a non-Thunderbolt USB-C laptop, the performance may be affected.

## REAR FACING PORTS\*

<b>6. DP 1.4 Port (2x)</b>	Please refer to the Video Output Resolution chart.
<b>7. Ethernet Port</b>	Connect to a router or modem at 10/100/1000 Mbps.  For 1000Mbps data speed, must use a Cat 5e or later ethernet cable.
<b>8. DC Input</b>	Connect to the power outlet using the included power cable

## COMPATIBLE OPERATING SYSTEM

Windows: Win10 10.0.18363 or above	Please ensure all device manufacturer and operating system software for your laptop is up to date.
Chrome: v84 or above	
macOS 11 Big Sur or later	
iPadOS 14.4 or later	

\*Please refer to illustration on the previous page

## ENVIRONMENT

Temperature – Operating	0°C to 40°C
Temperature – non-Operating	-40°C to 80°C
Relative Humidity – Operating	No requirement
Relative Humidity – non-Operating	90–95%, when the temperature is 80±2°C
Altitude – Operating	5000m
Altitude – non-Operating	5000m

## AC ADAPTER

Input Voltage	100–240 V ~2.0A, 50–60Hz
Output Voltage	22V=5.45A

## ACCESSORIES INCLUDED

	0.7m Thunderbolt 4 Cable with docking station tether
	<b>Important:</b> only use Thunderbolt cable provided with unit; other cables may void product warranty.
	If cable replacement is required, please contact your Steelcase dealer.