

SOLA³

Touch RFID Surface Mount – vertical orientation
A versatile electronic keypad designed to effortlessly secure day-use or private-use lockers. With multiple configurations, Sola 3 easily adapts to new or retrofit installations.

NEXT[®]
LOCK by Digilock[®]

- Touch RFID operation
- RFID standards - iClass and Mifare (13.56 MHz)
ISO 14443A • ISO 14443B • ISO 15693
- Cam locking mechanism
- Manage with electronic keys
- Dual functionality – shared or assigned use
- Management override and power bypass
- All metal housing
- Brushed nickel or black finish
- Vertical orientation – knob on the bottom
- Surface mount
- Designed for new or retrofit installations
- Multiple options for cam type and cylinder length
- 90° or 180° knob rotation (clockwise or counter-clockwise)
- Adapts to multiple door thickness
- Visual and audible indicators




- IP55 rated
- Powered by 4 AA batteries
- Battery Life: 115,000 cycles with average use
- Up to 2 year warranty


Touch RFID

Features


Top View

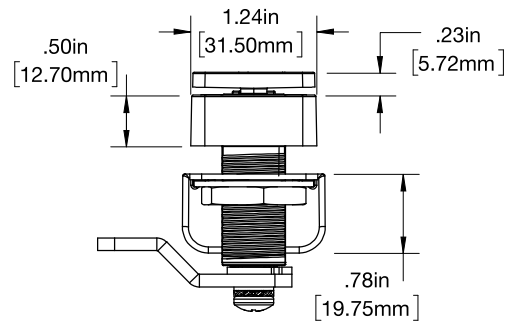


Side View

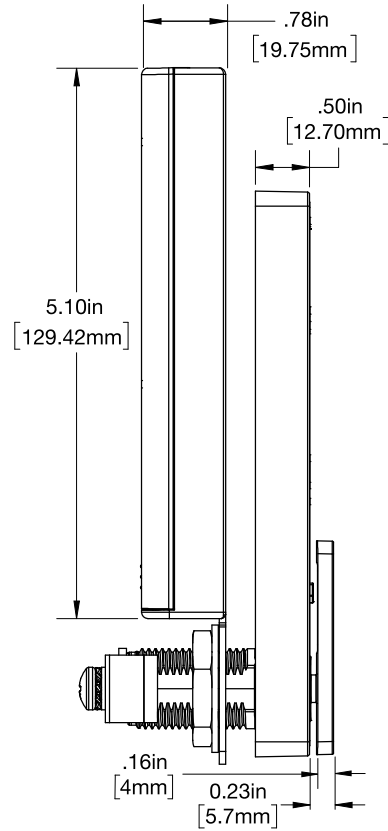

Front View

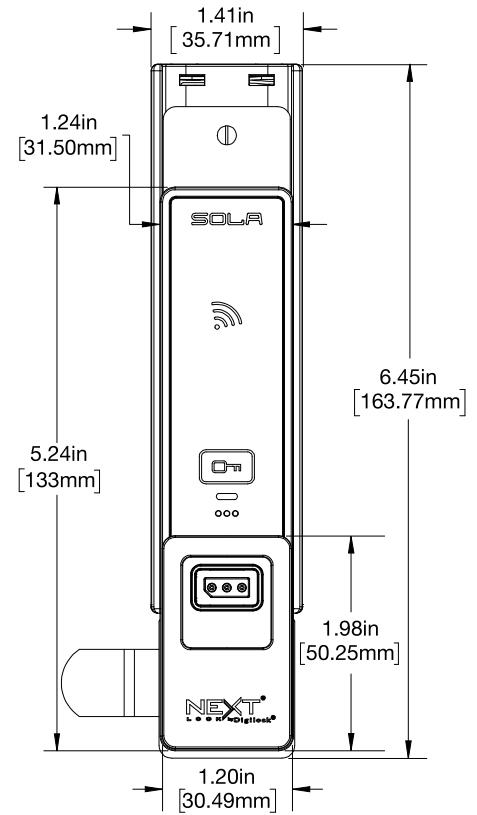


Cylinder Length

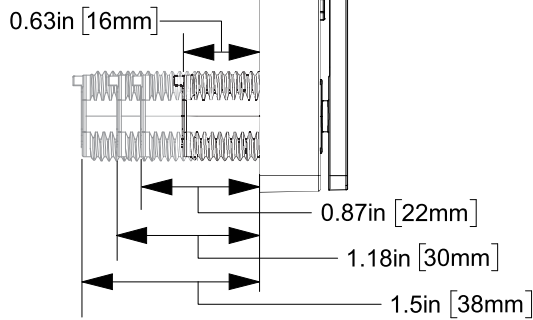


Cam Options

Offset Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.35in [8.92mm]	0.59in [14.92mm]	0.90in [22.92mm]	1.22in [30.92mm]
B	0.83in [21.18mm]	1.07in [27.18mm]	1.39in [35.18mm]	1.70in [43.18mm]

Flat Cam




	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.71in [18mm]	0.94in [24mm]	1.26in [32mm]	1.57in [40mm]

Lifter Cam



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.84in [21.25mm]	1.07in [27.25mm]	1.39in [35.25mm]	1.70in [43.25mm]
B	1.07in [27.25mm]	1.31in [33.25mm]	1.62in [41.25mm]	1.94in [49.25mm]
C	1.58in [40.16mm]	1.82in [46.16mm]	2.13in [54.16mm]	2.45in [62.16mm]

Slam Latch



	16MM CYLINDER	22MM CYLINDER	30MM CYLINDER	38MM CYLINDER
A	0.78in [19.70mm]	1.01in [25.70mm]	1.33in [33.70mm]	1.64in [41.70mm]